SAFETY

The DEWALT Rooftop Safety Kits are designed to provide you with a complete personal fall protection system, all in one convenient storage bucket. The kit includes our **D1000** full body harness, a **reusable rooftop anchor** and a **50-foot vertical lifeline** with manual rope grab that allows easy movement around the structure.

The DEWALT Fall Protection Compliance Kits are perfect for a variety of working at heights applications where existing anchor points are already in place. The kit includes our D1000 full body harness and a 6-foot energy absorbing lanyard. Work safely and with confidence!

COMPLIANCE KIT DXFP110001

FALL PROTECTION The DEWALT Fall Protection Kit provides the worker with a ready system for attaching to an approved anchorage point. It includes our D1000 harness with 5 pts of adjustment and pass-thru leg buckle connections, and a 6 ft energy absorbing lanyard, all to help ensure working safely at height. The kit comes in a convenient container for easy storage.

BENEFITS AND FEATURES

ABILITY: Heavy Duty Repellent Webbing, resists oil, water, and	LANYARD LENGTH:	6
s to help ensure ease of maintenance throughout its service life	HARNESS MATERIALS:	F
HTWEIGHT DESIGN: Built-in energy absorber reduces weight external shock pack design	LANYARD MATERIALS:	F
CK HARNESS CONNECTION: The pass-through connections	WEIGHT RATING:	ł
ide a quick and easy fit when donning the harness IVENIENT STORAGE: Durable bucket with handle for storing	STANDARDS MET:	4
ear	WARRANTY	L

SPECIFICATIONS

NYARD LENGTH:	6 Feet - (1.8 M)
RNESS Aterials:	Polyester Repellent Webbing, Steel
NYARD Aterials:	Polyester, Steel
EIGHT RATING:	Harness and Lanyard rated to 310 lbs. (141 Kg.)
ANDARDS MET:	ANSI Z359.1, Z359.11 OSHA 1910.66, 1926.502
ARRANTY	Limited 2 Year Warranty



FALL PROTECTION **COMPLIANCE KIT** DXFP120001

The DEWALT Fall Protection Kit provides the worker with a ready system for attaching to an approved anchorage point. It includes our D1000 harness with 5 pts of adjustment and tongue buckle leg buckle connections, and a 6 ft energy absorbing lanyard, all to help ensure working safely at height. The kit comes in a convenient container for easy storage.

LANYARD LENGTH: 6 Feet - (1.8 M)

Polvester Repellent Webbing, Steel

Harness and Lanyard rated to

Polvester, Steel

310 lbs. (141 Kg.)

ANSI Z359.1, Z359.11

0SHA 1910.66, 1926.502

Limited 2 Year Warranty

SPECIFICATIONS

ARNESS

LANYARD

MATERIALS:

MATERIALS:

WEIGHT RATING:

TANDARDS MET:

ARRANTY

BENEFITS AND FEATURES

DURABILITY: Heavy Duty Repellent Webbing, resists oil, water, and tains to help ensure ease of maintenance throughout its service life

IGHTWEIGHT DESIGN: Built-in energy absorber reduces weight over external shock pack design

UICK HARNESS CONNECTION: The pass-through and tounge buckle connections provide a quick and easy fit when donning the

CONVENIENT STORAGE: Durable bucket with handle for storing the gear





Manufactured and Distibuted by:



Trademark Licensee: DFP Safety Corp. 20711 Holt Avenue Suite 1525 Lakeville, MN 55044 1-800-391-1862

A licensee of DEWALT Industrial Tool Co.

www.DFPSAFETY.com

P/N : DL 209001 Rev. C 12/14/22

©2022 DEWALT. DEWALT® and GUARANTEED TOUGH® are registered trademarks of DEWALT Industrial Tool Co. and used under license by DEWALT Fall Protection. All rights reserved. The yellow and black color scheme is a trademark for DEWALT power tool and accessories.

All rights reserved. Neither this brochure not its text,illustrations,drawings of any part thereof, may be reproduced, stored in a retreival system, photcopied, recorded or trasmitted in any form, whether electonic or otherwise, without consent. To the best of our knowledge, all descritpions and illustrations contained in this brochure are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification. © DEWALT® 2022



DEWALT

PROTECTION **ROOFING AND COMPLIANCE** PRODUCTS





PR

The DEWALT new fall protection line-up is designed to provide you with convenient personal fall protection solutions, whether in kits or individual items. Work safely during roof top appli-cations or select a kit that provides you with the basic compliance in a variety of working at heights situations. Our products are designed and tested to OSHA and ANSI standards to give you confidence that you can safely perform your work.

HEIGHTS

The DEWALT Rooftop Safety Kits are designed to provide you with a complete personal fall protection system, all in one convenient storage bucket. The kit includes our D1000 full body harness, a reusable rooftop anchor and a 50-foot vertical lifeline with manual rope grab that allows easy movement around the structure.

ROOFTOP SAFETY KIT The DEWALT Rooftop safety kit offers a complete setup for roofing DXFP110050

applications. It includes our D1000 harness with 5 pts of adjustment and pass-thru leg buckle connections, a reusable rooftop anchor with nails and screws for easy installation, and a 50' (15.2 m) lifeline with an integrated energy absorber for full compliance and safety on the job. It all comes in a convenient container for easy storage.

BENEFITS AND FEATURES

DURABILITY: Heavy Duty Repellent Webbing, resists oil, water, and stains to help ensure ease of maintenance throughout its service life

EASY INSTALLATION: The coated reusable steel roof anchor with fasteners comes ready to quick install.

VERSATILITY: Hinged design allows anchor to adapt to varing roof pitches and comes with both nails and screws for easy installation.

UICK HARNESS CONNECTIONS: The pass-through buckles provide a quick and easy fit when donning the harness.

EASY OF MOVEMENT: Vertical Lifeline Assembly with energy absorber, and permanently attached Positioning Device allows for mooth movement on the surface.

SPECIFICATIO	NS
ROPE LENGTH:	50-feet (15.2 M)
MATERIALS:	Repellent Polyester webbing, steel, and Poly steel rope
WEIGHT RATING:	Harness and Lanyard rated to 310 lbs. (141 Kg.)
STANDARDS MET:	ANSI Z359.1, Z359.11 OSHA 1910.66, 1926.502

ST I

Limited 2 Year Warranty ARRANTY



ROOFTOP SAFETY KIT The DEWALT Rooftop safety kit offers a complete setup for roofing applications. It includes our D1000 harness with 5 pts of adjustment and tongue buckle leg buckle connections, a reusable roofton anchor with nails and screws for easy installation, and a 50 ft. (15 m.) lifeline with an integrated energy absorber for full compliance and safety on the job. It all comes in a convenient container for easy storage.

ROPE LENGTH: 50-feet (15.2 M)

Repellent Polyester webbing, steel, and

Poly steel rope

310 lbs. (141 Kg.)

OSHA 1910.66, 1926.502

Limited 2 Year Warrantv

WEIGHT RATING: Harness and Lanyard rated to

TANDARDS MET: ANSI Z359.1, Z359.11

SPECIFICATIONS

MATERIALS:

RRANTY

BENEFITS AND FEATURES

URABILITY: Heavy Duty Repellent Webbing, resists oil, water, and stains to help ensure ease of maintenance throughout its service life

EASY INSTALLATION: The coated reusable steel roof anchor with fasteners comes ready to quick install.

VERSATILITY: Hinged design allows anchor to adapt to varing roof itches and comes with both nails and screws for easy installation.

QUICK HARNESS CONNECTIONS: The pass-through and tongue buckles provide a quick and easy fit when donning the harness.

EASY OF MOVEMENT: Vertical Lifeline Assembly with energy absorber, and permanently attached Positioning Device allows for mooth movement on the surface.



FALL PROTECTION
HARNESS
DXFP512001

ensure compliance and maximum safety when working at height. It features 5 points of adjustment, pass-through chest and leg attachments, and lanyard keepers. The heavy-duty polyester repellent webbing resists oil, water, and stains to help ensure ease of maintenance throughout its service life.

BENEFITS AND FEATURES

URABILITY: Heavy Duty Repellent Webbing, resists oil, water, and ains to help ensure ease of maintenance throughout its service life
ONVENIENT LANYARD STORAGE: Two lanyard keepers to afely park unused lanyard legs.
UICK HARNESS CONNECTION: The pass-through buckles rovide a quick and easy fit when donning the harness
AFETY ALERT: Built indicator provide visual confirmation when a ill has occurred and the harness should be removed from service.

BBING BUCKLES & ADJUSTERS: WEIGHT RATING: ARDS MET: ANSI Z359.11

FALL PROTECTION	
HARNESS	
DXFP512002	

The DEWALT D1000 Full Body Harness provides everything you need to ensure compliance and maximum safety when working at height. It features 5 points of adjustment, pass-through chest and tongue buckle leg attachments, and lanyard keepers. The heavy-duty polyester repellent webbing resists oil, water, and stains to help ensure ease of maintenance throughout its service life.

FRRING

BUCKLES &

ADJUSTERS:

WEIGHT RATING:

RRANTY

BENEFITS AND FEATURES


safely park unused lanyard legs.

DURABILITY: Heavy Duty Repellent Webbing, resists oil, water, and stains to help ensure ease of maintenance throughout its service life **CONVENIENT LANYARD STORAGE:** Two lanyard keepers to

OUICK HARNESS CONNECTION: The pass-through and tongue buckles provide a quick and easy fit when donning the harness.

SAFETY ALERT: Built indicator provide visual confirmation when a fall has occurred and the harness should be removed from service.

ANDARDS MFT:

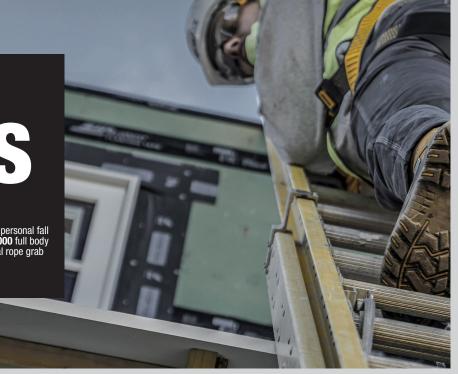

6 FT. (1.8M.) ENERGY **ABSORBING LANYARD** DXFP612111

BENEFITS AND FEATURES

IGHTWEIGHT DESIGN: BU over external shock pack design.

DURABILITY: Plated steel hard

extended life and durability.

The DEWALT energy absorning lanyard provides compliance at a great value. It features a one piece lanyard with an internal energy absorber, durable polyester webbing and plated-steel snap-hooks. with 3600 lbs.(1632 kg.) ANSI-approved gates. An excellent choice for a variety of worksites.

SPECIFICATIONS

ilt-in energy absorber reduces weight	MATERIALS:
	LENGTH:
ware and Polyester webbing for	HOOKS:
	STANDARDS MET:
r provide visual confirmation when a	

SAFETY ALERT: Built indicator fall has occurred and the harness should be removed from service.

Polyester, and Steel

LENGTH:	6 Feet - (1.8 M.)
HOOKS:	ANSI Compliant 3600 lbs. (1632 Kg.)
STANDARDS MET:	ANSI Z359.3 OSHA 1910.66, 1926.502
WARRANTY	Limited 2 Year Warranty



The DEWALT D1000 Full Body Harness provides everything you need to

SPECIFICATIONS

Repellent Polyester - 5000 lbs.(2267 Kg.) mit static strength

Plated alloy steel

Harness rated to 310 lbs. (141 Kg.)

OSHA 1910.66, 1926.502

Limited 2 Year Warranty

SPECIFICATIONS

Repellent Polyester - 5000 lbs.(2267 Kg.) min. static strength

Plated allov steel

Harness rated to 310 lbs. (141 Kg.)

ANSI Z359.11 0SHA 1910.66, 1926.502

Limited 2 Year Warranty



REPELLENT
WEBBING RESISTS OIL-WATER-STAINS

ASSEMBLY DXFP210050

BENEFITS AND FEATURES

VERTICAL LIFELINE The DEWALT 50 ft. (15.2 M.) Vertical Lifeline with Rope Adjustor is designed as a key component for roof-top safety. The rope is water and abrasion resistant for strength and durability, while the built-in rope adjustor provides the versatility of free movement or fixing in place for fall restraint. When used with a DEWALT roof-top anchor and harness it becomes and integral piece in a personal fall arrest system.

SPECIFICATIONS

BRASION RESISTANT:	Poly-Steel rope resists abrasion and wate	er
r longer life.		

STRENGTH & DURABILITY: Alloy steel hardware with zinc plating for high strength and longer life.

EASE OF MOVEMENT: Manual positioning device allows for smooth movement around working surfaces.

BUILT IN SAFETY: Integral 2 ft. (0.6M.) energy absorbing lanvard for quick arrest in the event of fall.

ROPE LENGTH:	50 Feet - (15.2 M.)
MATERIALS:	Poly-Steel Rope, Alloy Steel, Polyester
WEIGHT CAPACITY RANGE:	130-420 lbs. (58-190 Kg.)
MINIMUM BREAKING STRENGTH:	5000 lbs. (2267 Kg.)
STANDARDS MET:	ANSI Z359.1 OSHA 1910.66, 1926.502
WARRANTY	Limited 2 Year Warranty



REUSABLE ROOF ANCHOR DXFP842001

The DEWALT Reusable Roof Anchor is designed for use on wood, structures The hinged design allows it to work on nearly all roof pitches. The anchor is made of coated steel for longer lasting product life. It can be installed with either screws or nails (depending on roof pitch), and comes with both nails and a QTY 12 # 12x2" hex head fasteners included.

SPECIFICATIONS

BENEFITS AND FEATURES

REUSABLE DESIGN:	Designed for repeated use with fasteners.
VERSATILITY:	Hinged design allows anchor to adapt to varying roof pitches and comes with both nails and screws for easy installation.
DURABILITY:	Plated steel construction with powder coating for high strength and durability.

WEIGHT CAPACITY RANGE:	130-420 lbs. (58-190 Kg.)
MATERIALS:	Powedered Coated Steel
MINIMUM BREAKING STRENGTH:	5000 lbs. (2267 Kg.)
STANDARDS MET:	ANSI Z359.18 OSHA 1910.66, 1926.502
WARRANTY	Limited 2 Year Warranty



