

6 Ft. [1.8M.] CONCRETE ANCHOR STRAP

Web Loop On Both Ends

DXFP813006

BENEFITS AND FEATURES


The DEWALT 6 ft.(1.8m.) concrete web anchor strap with web loop provides a strong, durable and flexible temporary fall protection anchor point. It is designed to be choked to rebar and embedded into the poured concrete and cut off once construction is completed.

DURABILITY: The 1-3/4 in.(4.4 cm.) polyester webbing strength member with the 2 in.(5.08 cm.) polyester webbing wear pad provides exceptional strength, wear, oil, dust and water protection.

ECONOMICAL: Provides an economical means to ensure sufficient anchor points are in place throughout the construction process.

STRENGTH: Meets OSHA and ANSI standards of 5,000 lbs. (23kN) anchor point.

FLEXIBILITY: Provides an economical means to ensure sufficient anchor points are in place throughout the construction process.

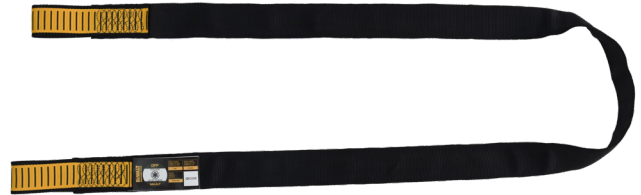

SPECIFICATIONS

Length: 6 Ft. [1.8 m.]

Capacity: 310 lbs. (140) Kg.

Breaking Strength: 5,000 lbs. (2267) kg.

Materials of construction: Polyester, Steel

RELEVANT STANDARDS

Meets ANSI Z359.18-2017, OSHA 1926.502, 1910.140

WARNINGS

- Read, understand and follow all labels and instructions prior to use.
- Inspect before each use.
- Remove from service if there is evidence of damage or excessive wear.

WARRANTY

2 YEAR LIMITED WARRANTY