

6 Ft. [1.8M.] WELDING ANCHOR STRAP

D-Ring on both ends

DXFP817006

BENEFITS AND FEATURES


The DEWALT 6 ft.(1.8m.) welding choker style web anchor strap provides a strong, durable and flexible temporary fall protection anchor solution for most welding or spark applications.

DURABILITY: Made of Aramid FR for durable flame resistance, the 1-3/4in.(4.4cm.) Aramid FR webbing strength member provides exceptional strength and wear protection for welding applications.

COMPACT AND LIGHTWEIGHT: Weighing only 1.08 lbs (0.49kg.), this temporary anchor strap is easily moved and reused from location to location.

STRENGTH: Meets OSHA and ANSI standards of 5,000 lbs. (23kN) anchor point.

FLEXIBILITY: Can be used as a vertical or horizontal temporary anchor point around beams, posts or other structural members.

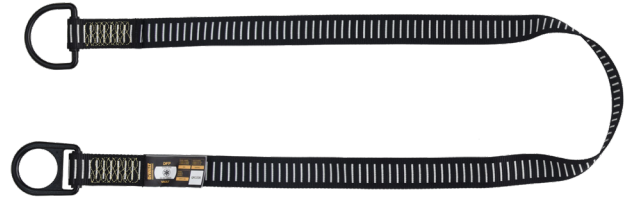

SPECIFICATIONS

Length: 6 Ft. [1.8 m.]

Capacity: 310 lbs. (140) Kg.

Breaking Strength: 5,000 lbs. (2267) kg.

Materials of construction: Aramid FR Webbing, Steel

RELEVANT STANDARDS

Meets ANSI Z359.18-2017, OSHA 1926.502, 1910.140

WARNINGS

- Read, understand and follow all labels and instructions prior to use.
- Inspect before each use.
- Remove from service if there is evidence of damage or excessive wear.

WARRANTY

2 YEAR LIMITED WARRANTY